

FIG. 1

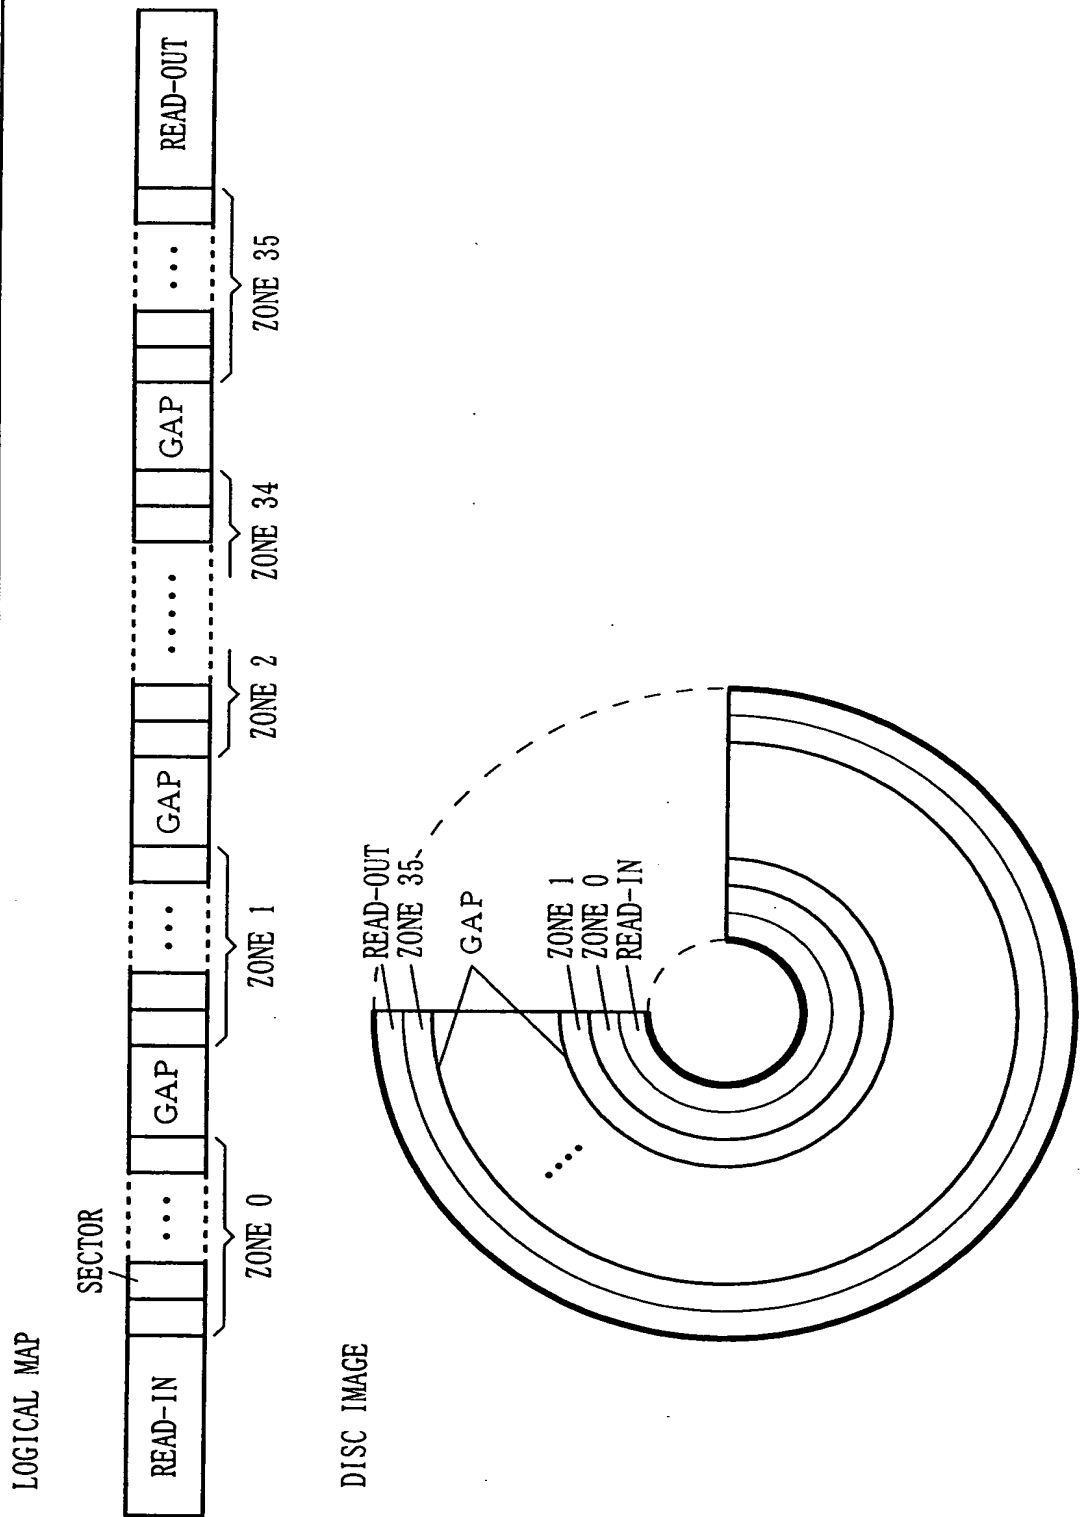


FIG. 2

LOGICAL MAP

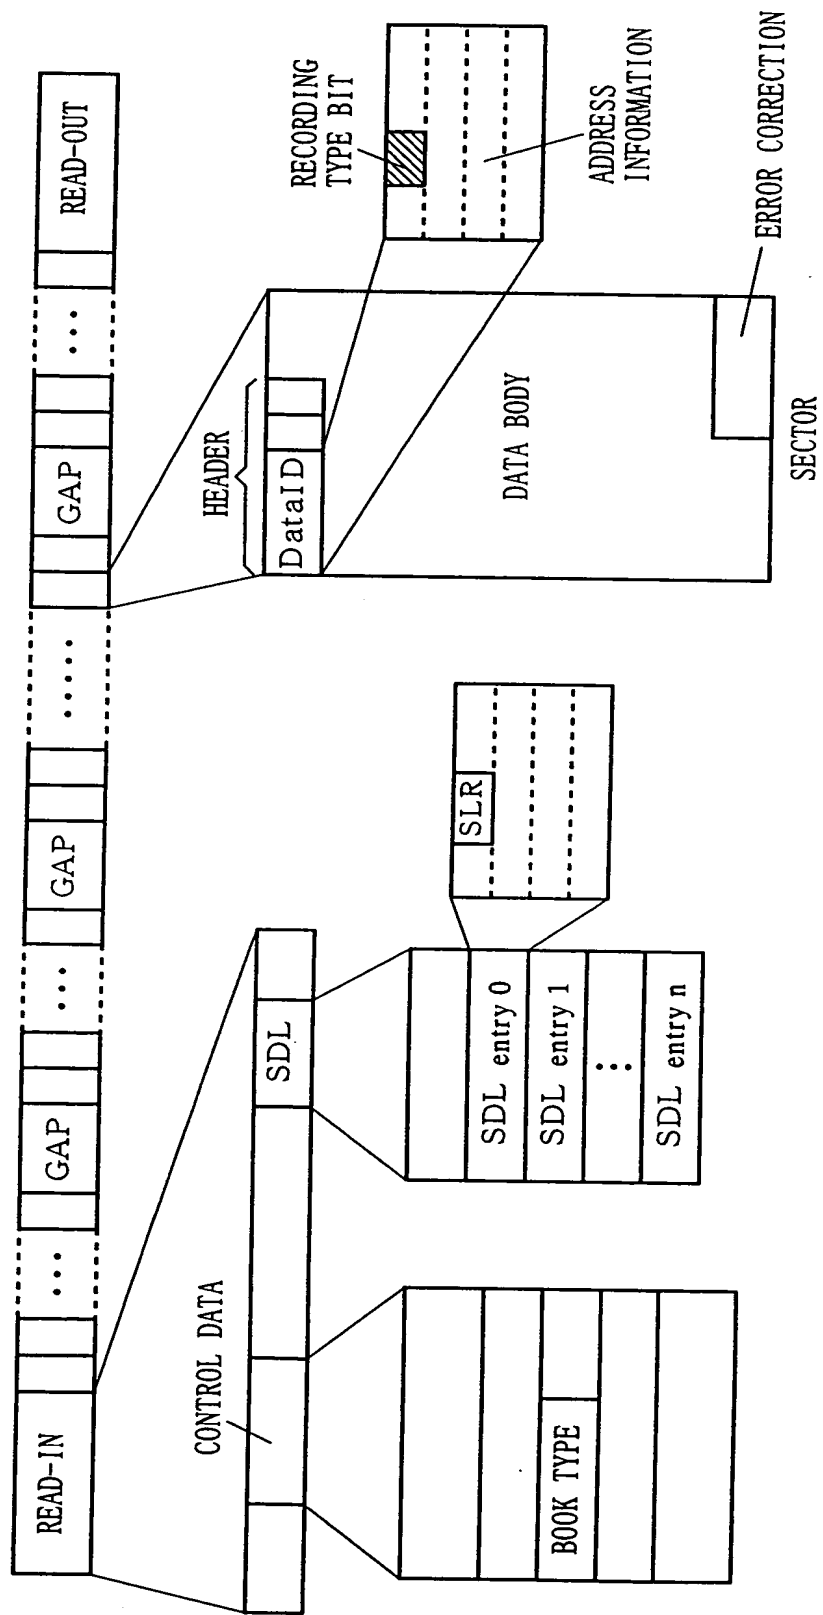


FIG. 3

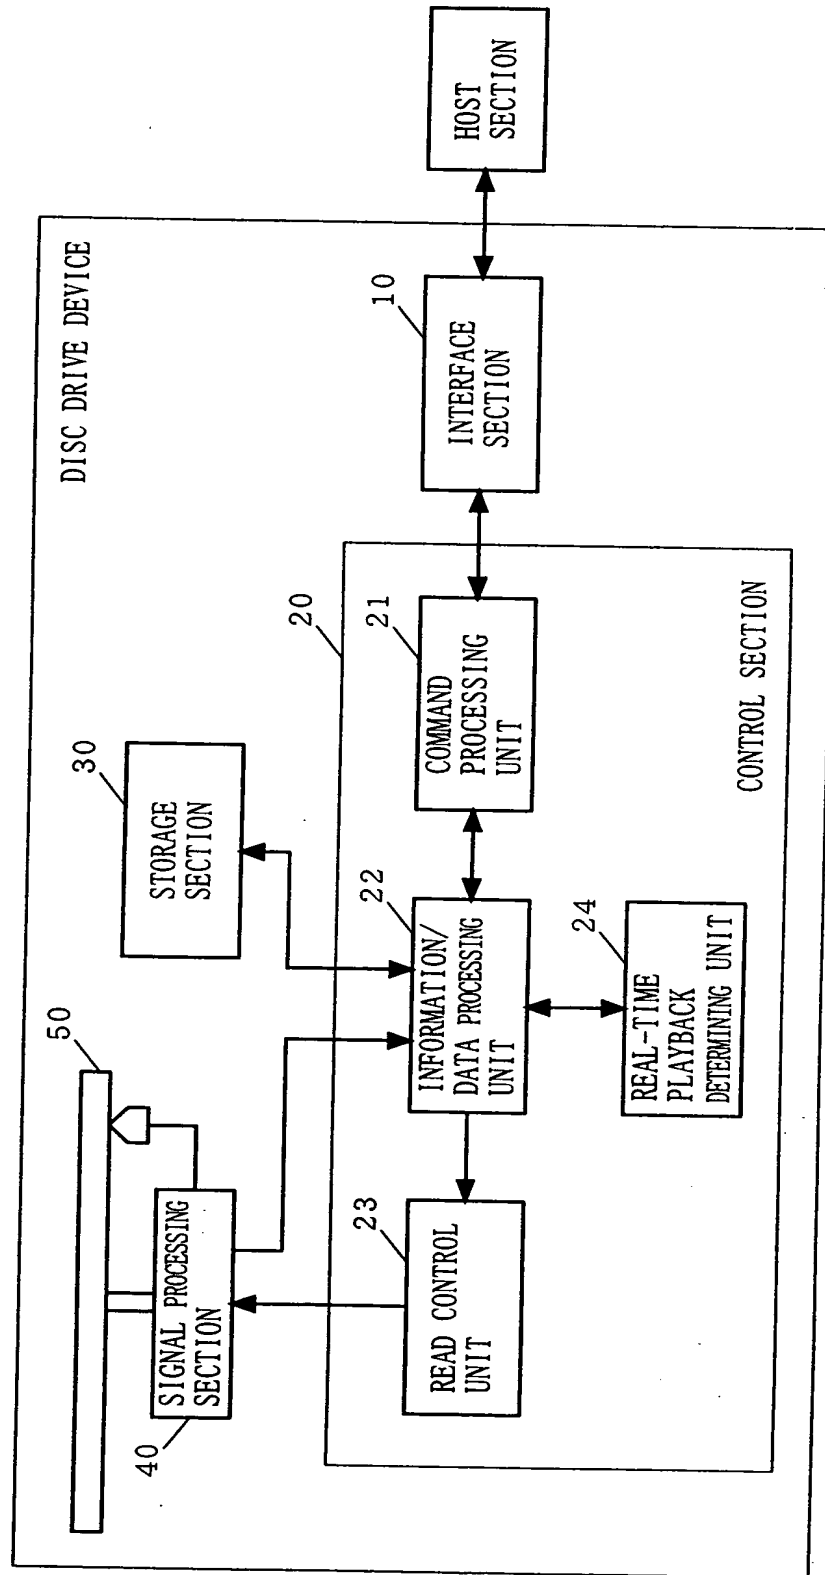


FIG. 4

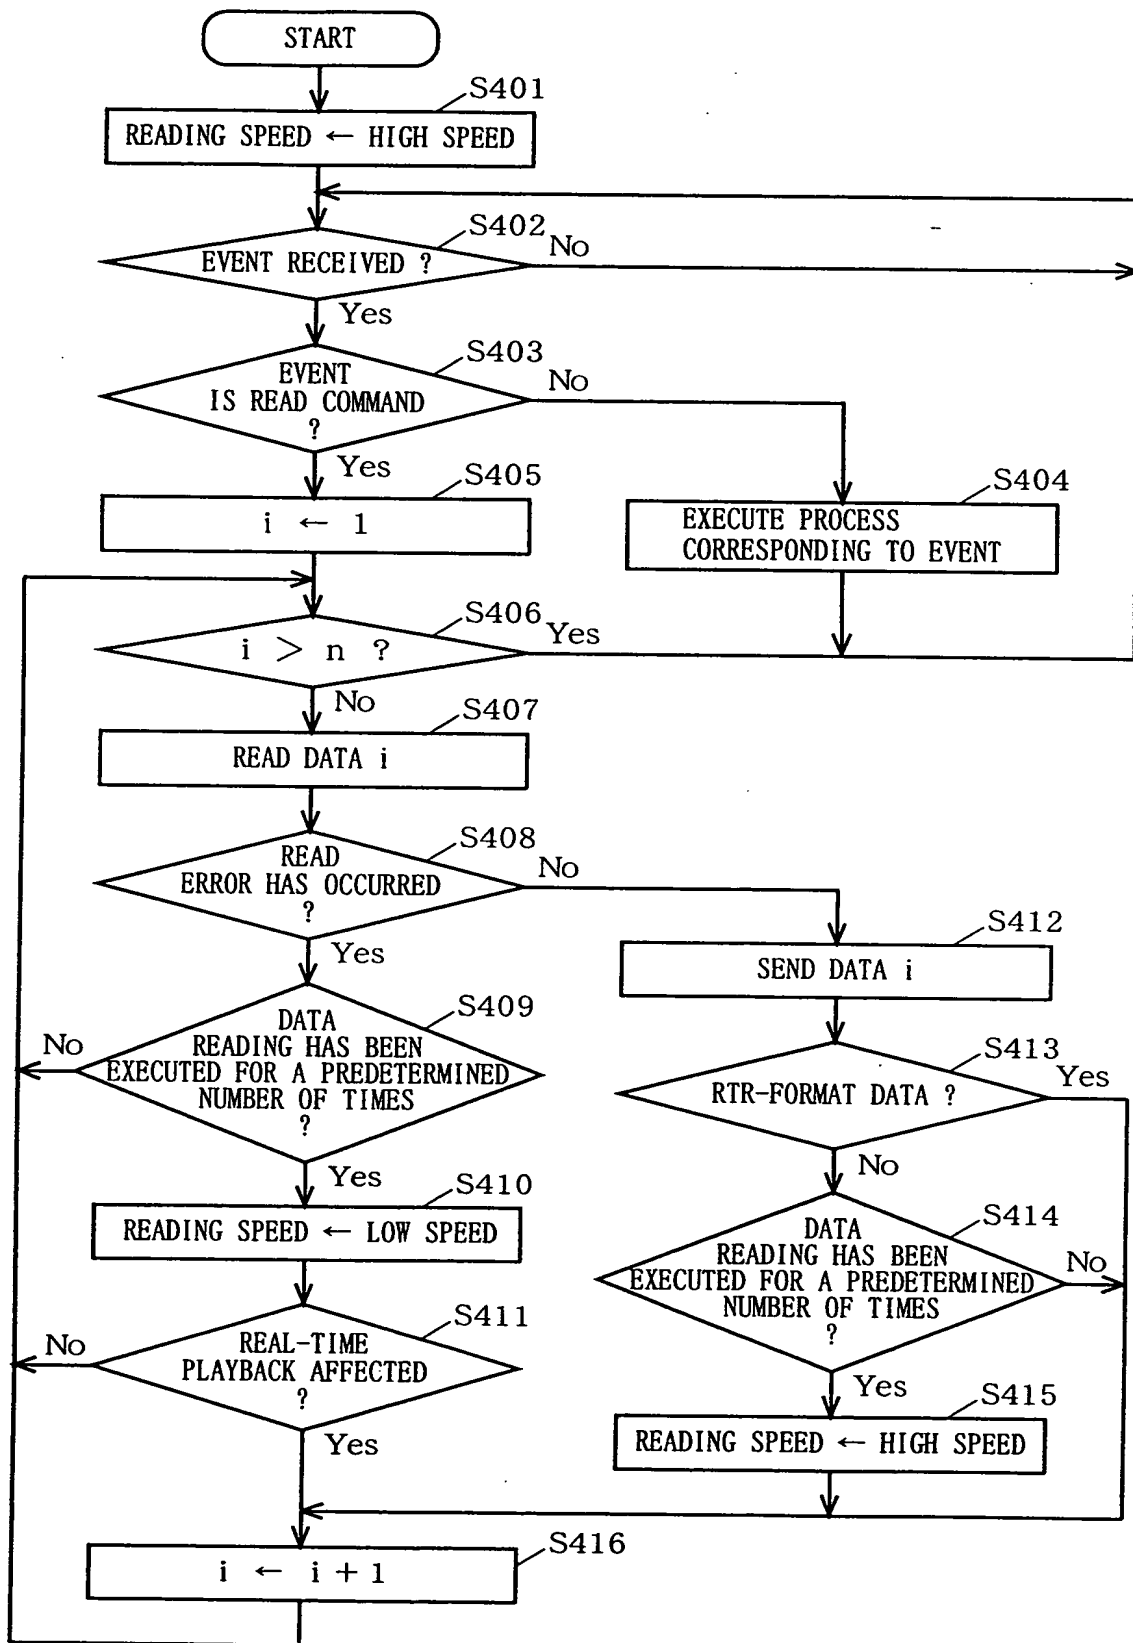


FIG. 5

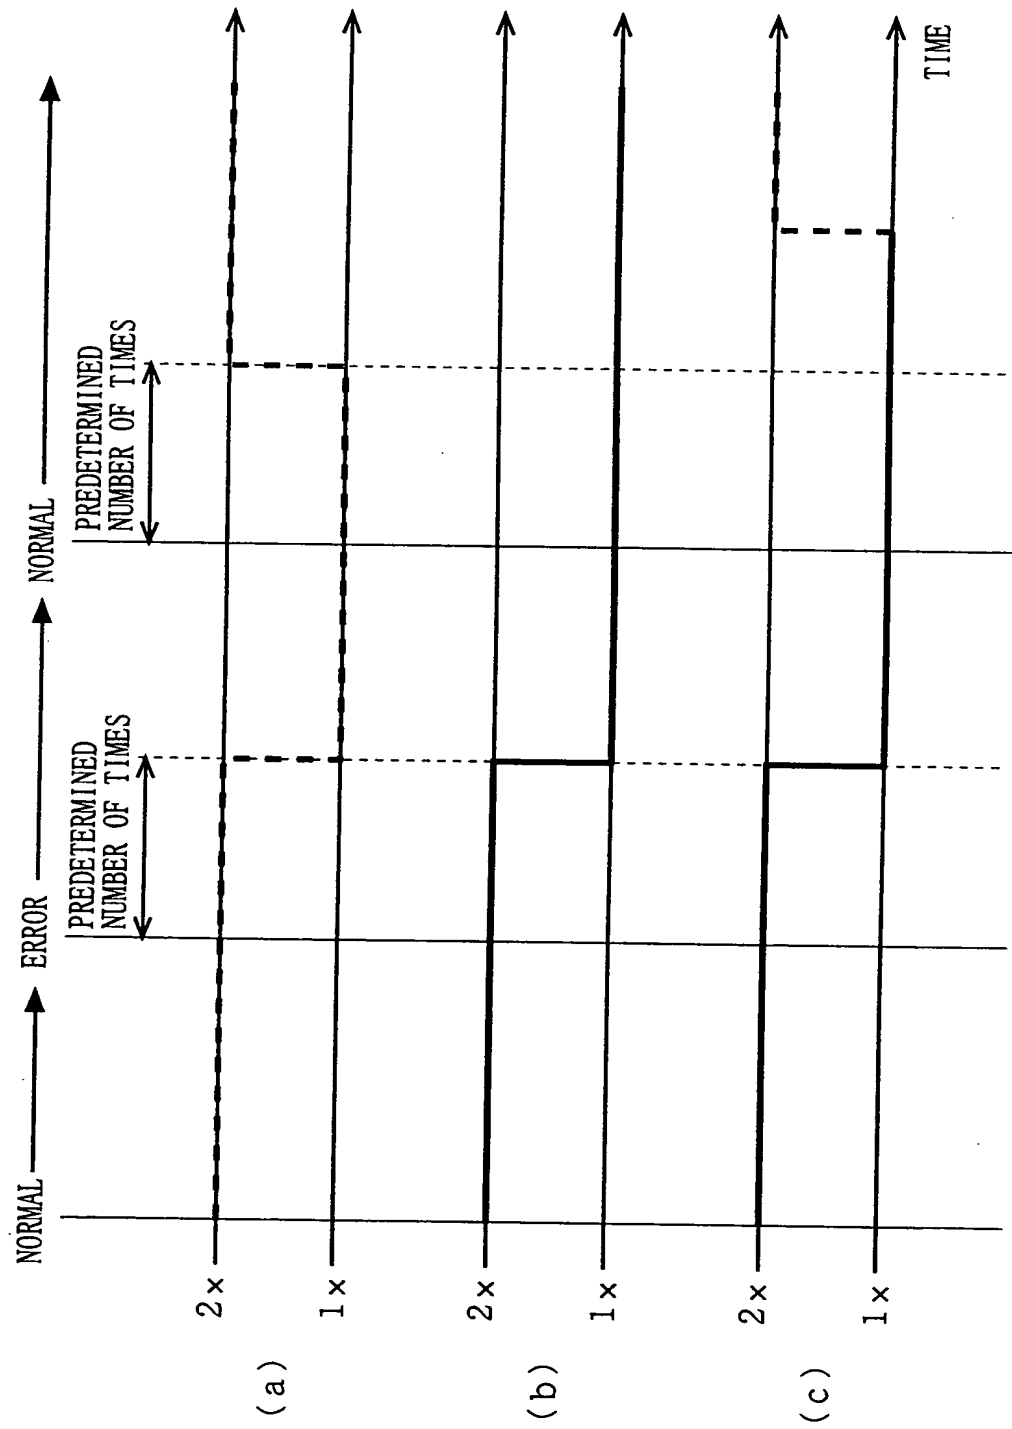


FIG. 6

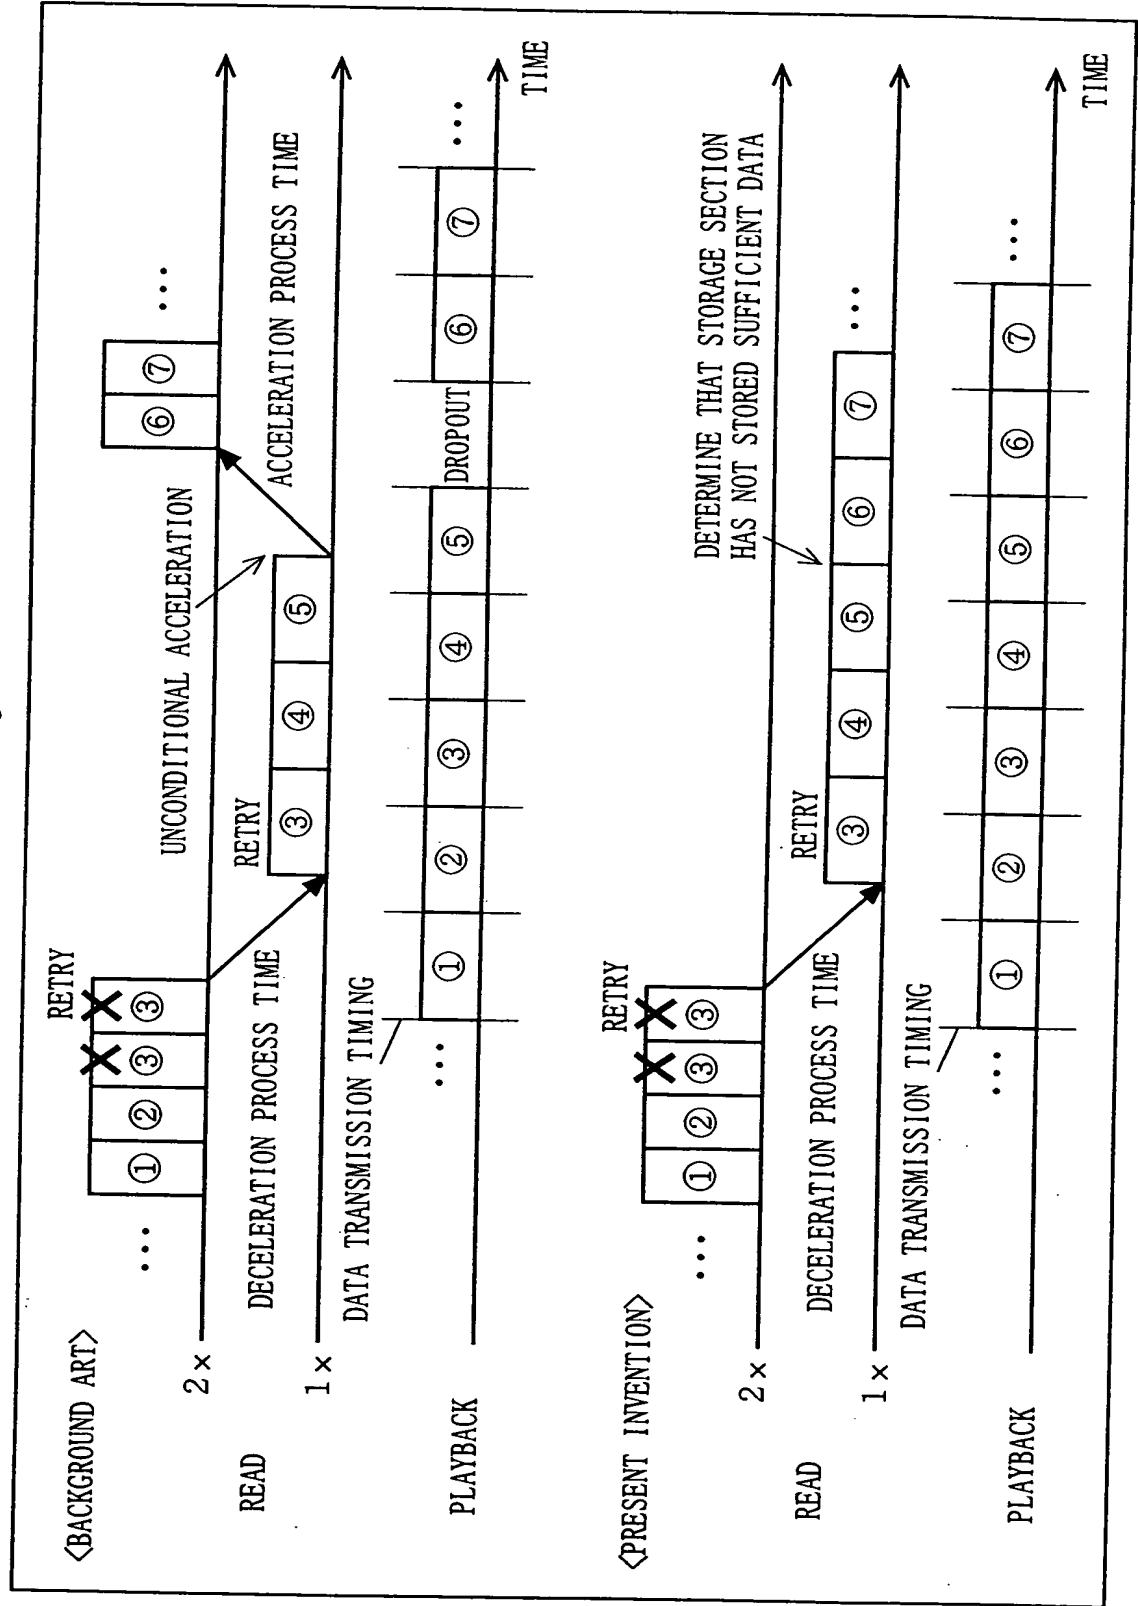


FIG. 7

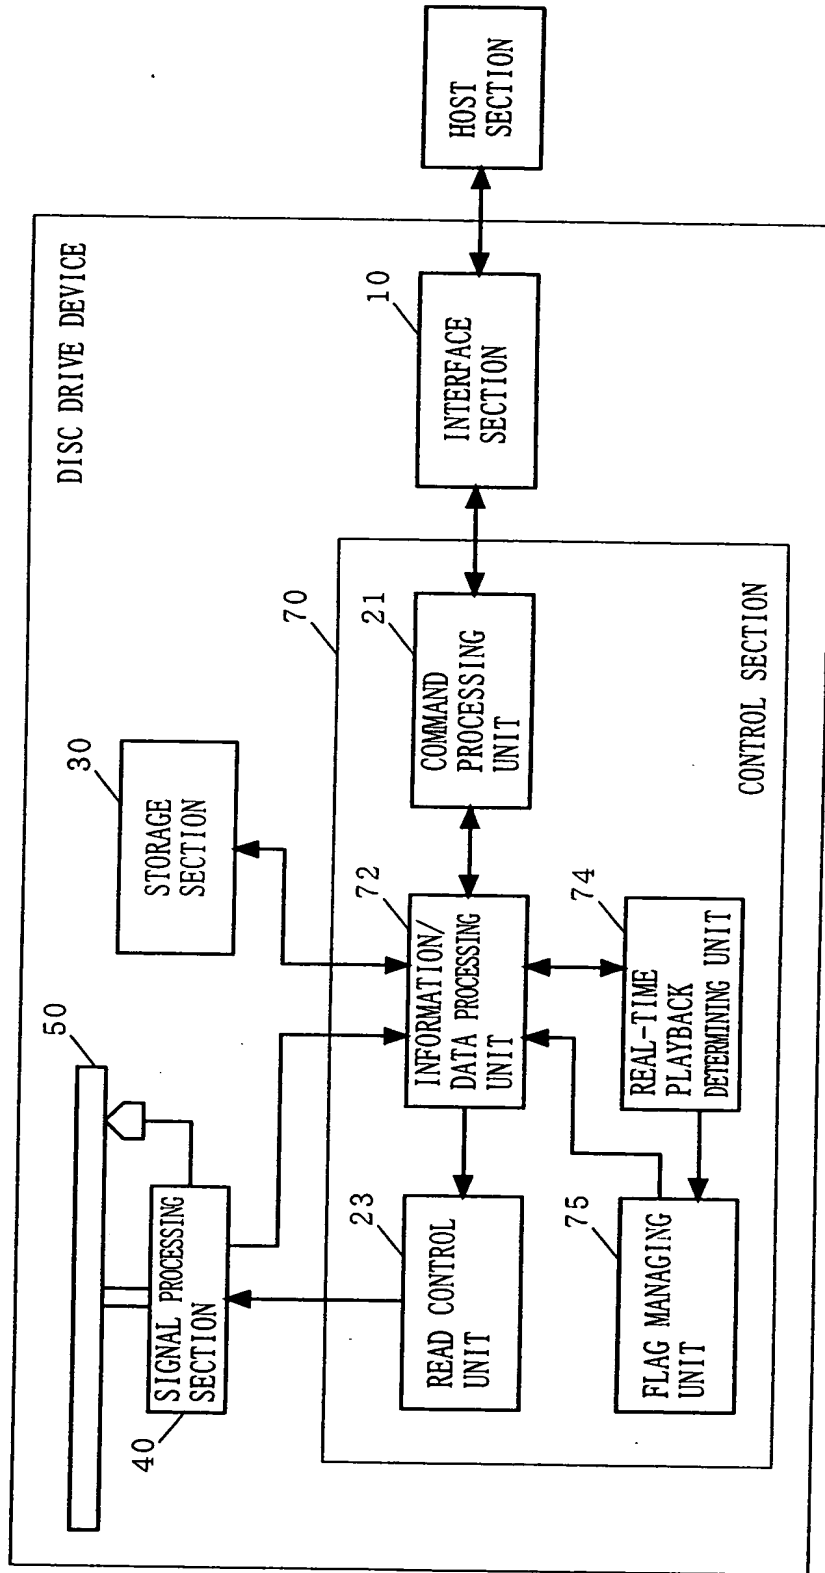


FIG. 8

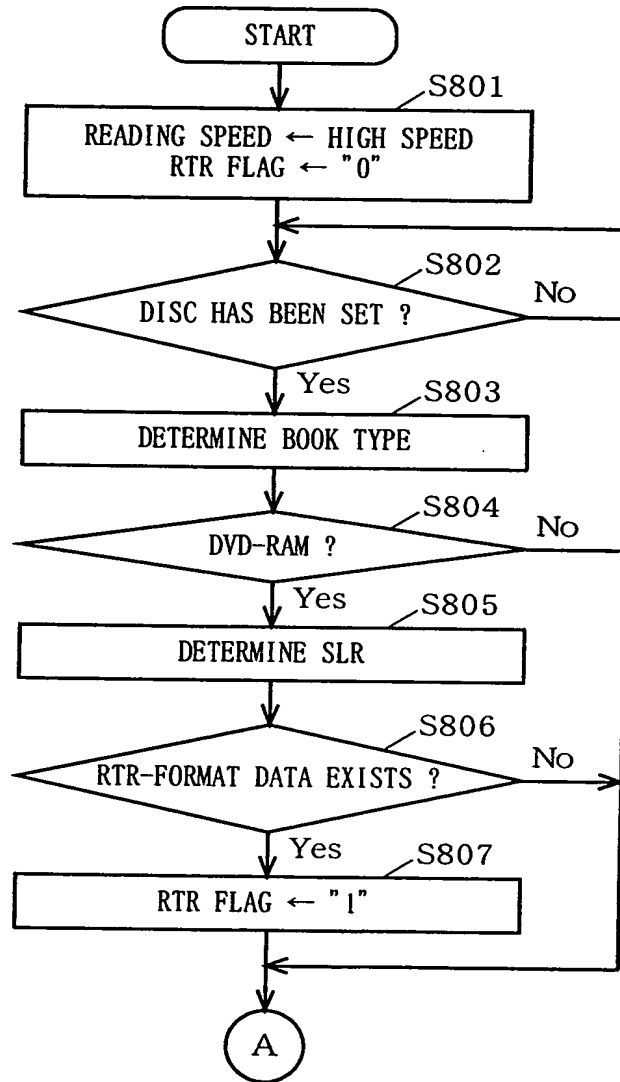


FIG. 9

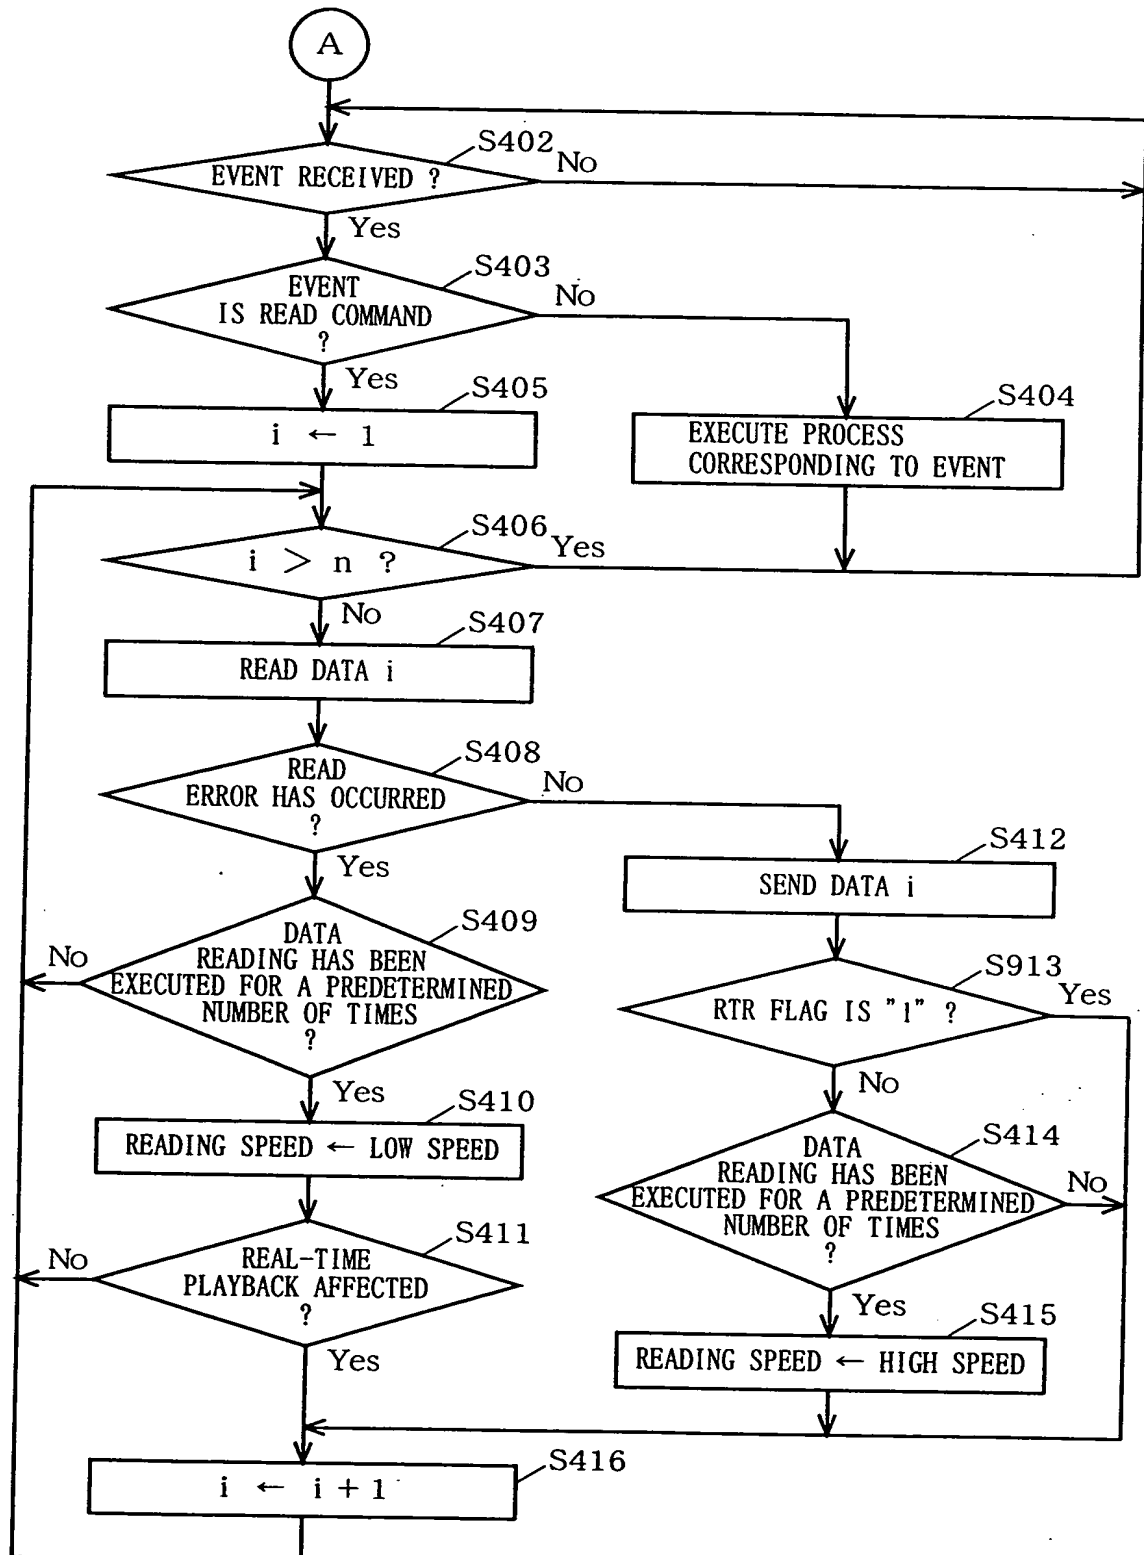


FIG. 10

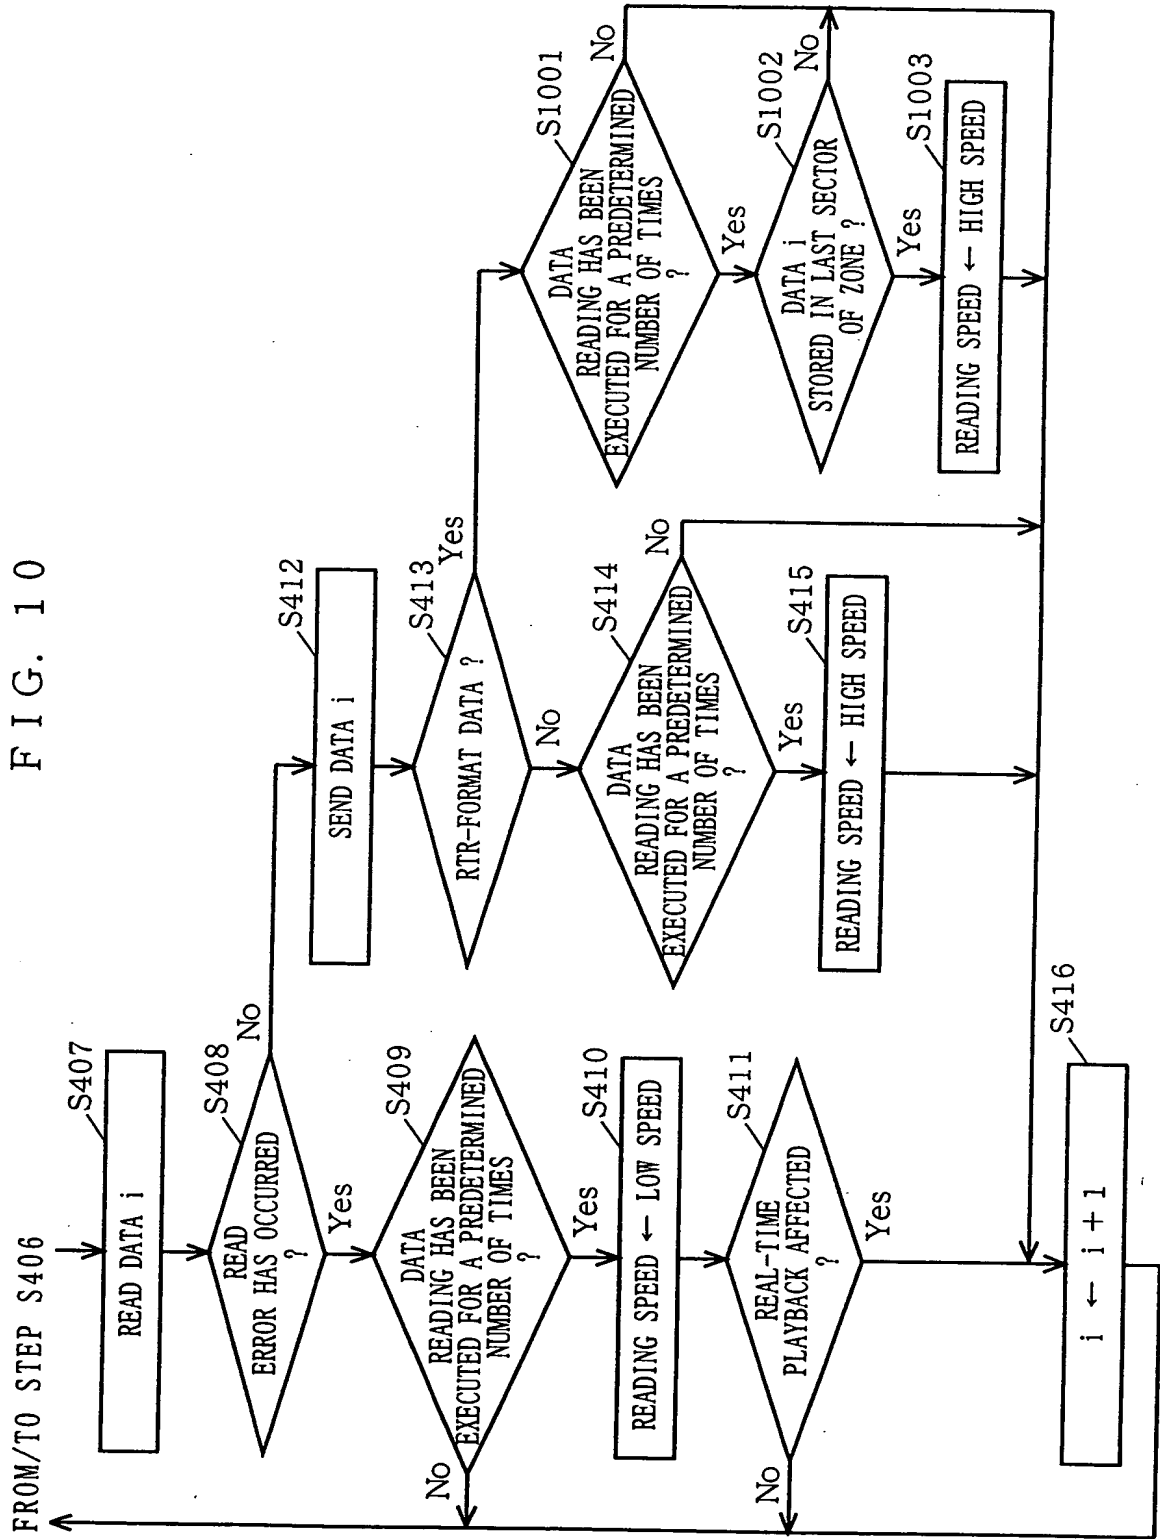


FIG. 11

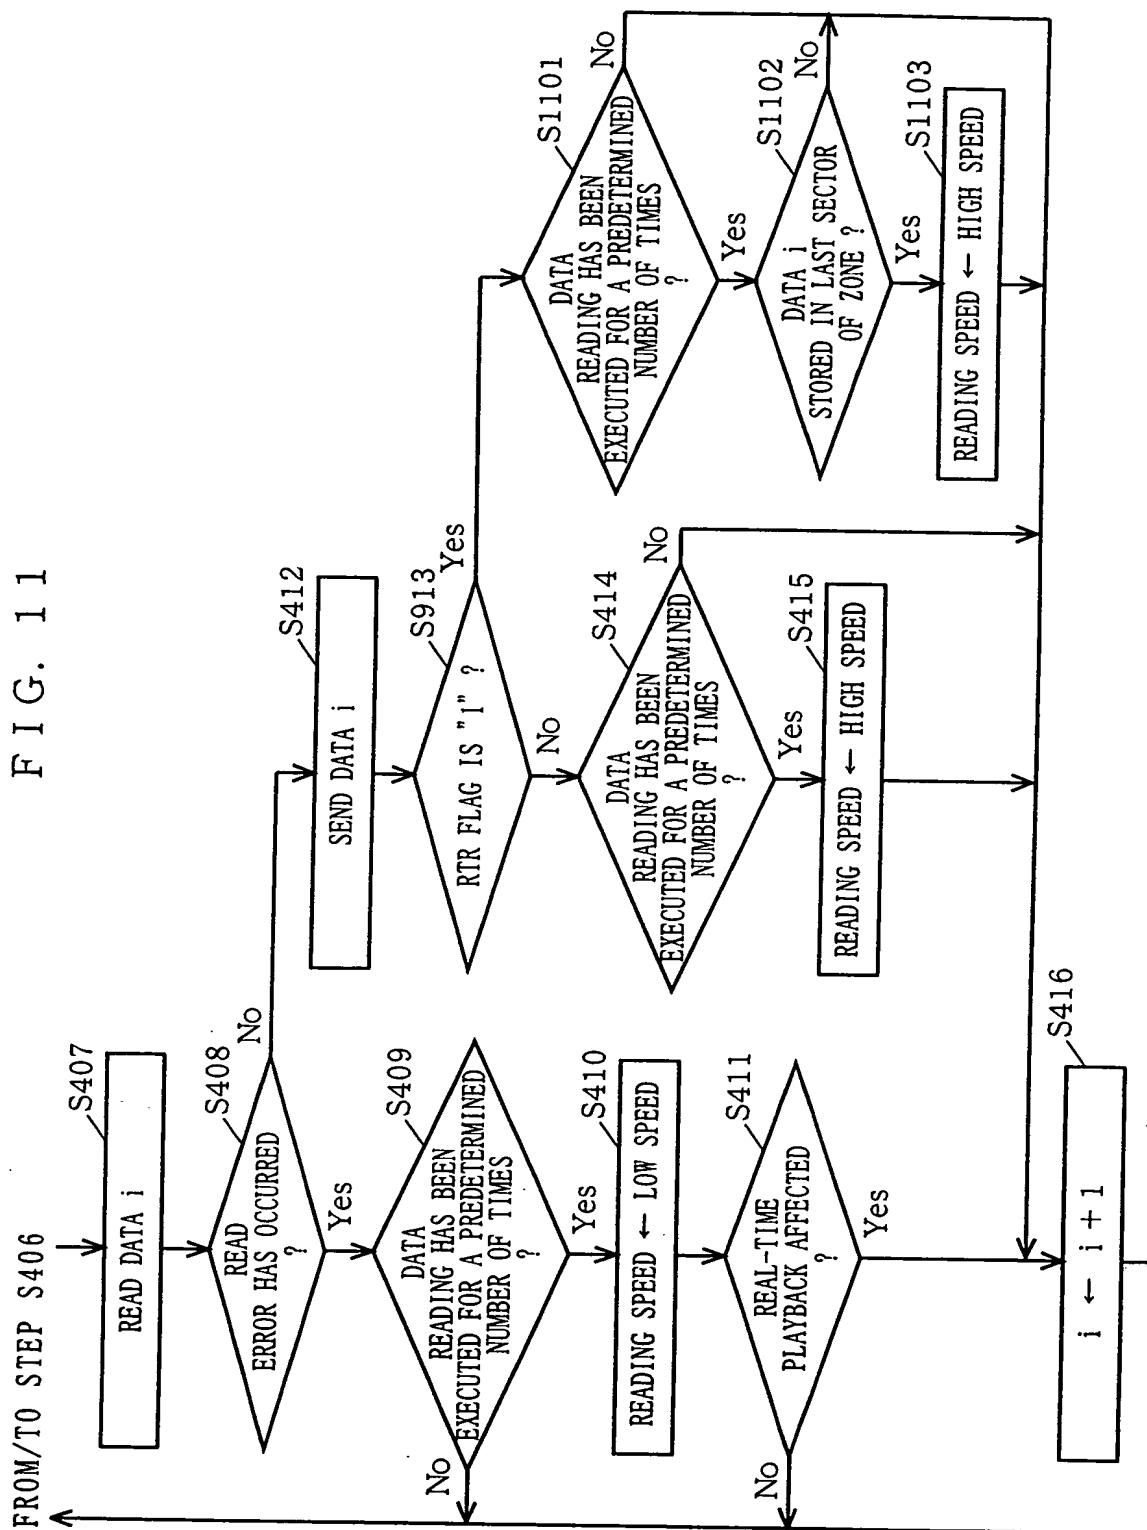


FIG. 12

PARAMETERS OF ATAPI READ12 COMMAND

| Byte | Bit | 7 | 6 | 5 | 4 | 3 | 2 | 1 | 0 |
|------|---------------|--------------------------------------|---|---|---|---|---|---|---|
| 0 | | CODE VALUE REPRESENTING READ REQUEST | | | | | | | |
| 1 | | | | | | | | | |
| 2 | | HEAD ADDRESS OF DATA TO BE READ | | | | | | | |
| 3 | | | | | | | | | |
| 4 | | | | | | | | | |
| 5 | | | | | | | | | |
| 6 | | LENGTH OF DATA TO BE READ | | | | | | | |
| 7 | | | | | | | | | |
| 8 | | | | | | | | | |
| 9 | | | | | | | | | |
| 10 | STREAMING BIT | RESERVED AREA | | | | | | | |
| 11 | | | | | | | | | |